



Gothic **OF 04** 900x900 / 36"x36" ST RECT EVO\_2/E™ 20 mm

# OFFICINE

**Officine comes in the EVO\_2/E™ version. The Officine slabs for outdoor use take on a concrete effect, featuring all the characteristics of porcelain stoneware in a 20-mm thickness.**

This collection is the fruit of a painstaking process of research and experimentation, bringing an underground, cosmopolitan edge to each setting.



Romantic **OF 02** 900x900 / 36"x36" ST RECT EVO\_2/E™ 20 mm






Dark **OF 03** 600x600 / 24"x24" ST RECT EVO\_2/E" ±20 mm

**COLORI**

Colours | Farben | Couleurs | Colores | Цветов | 种颜色

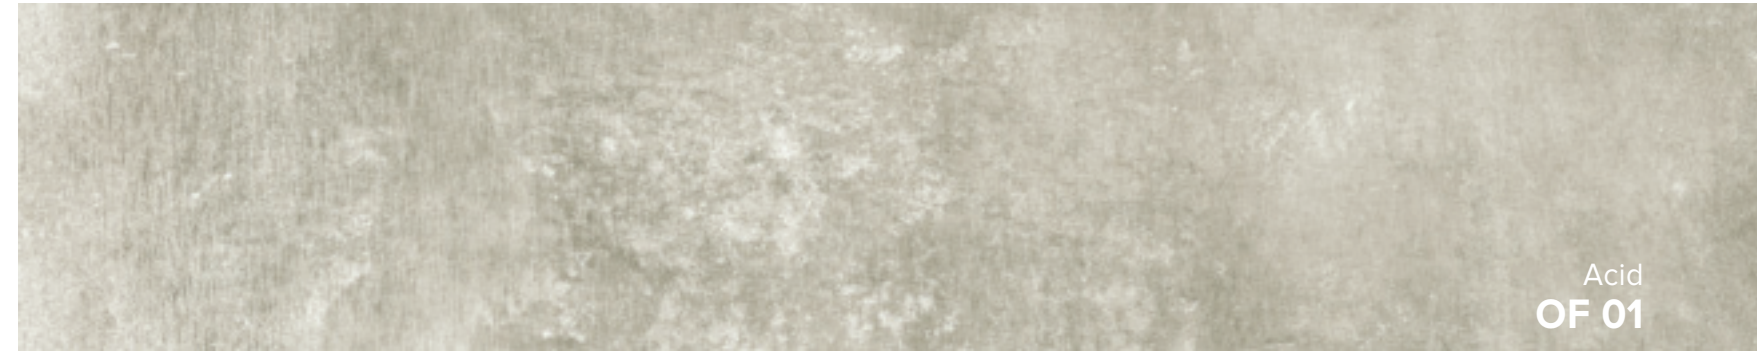


Acid  
**OF 01**



Romantic  
**OF 02**



Dark  
**OF 03**

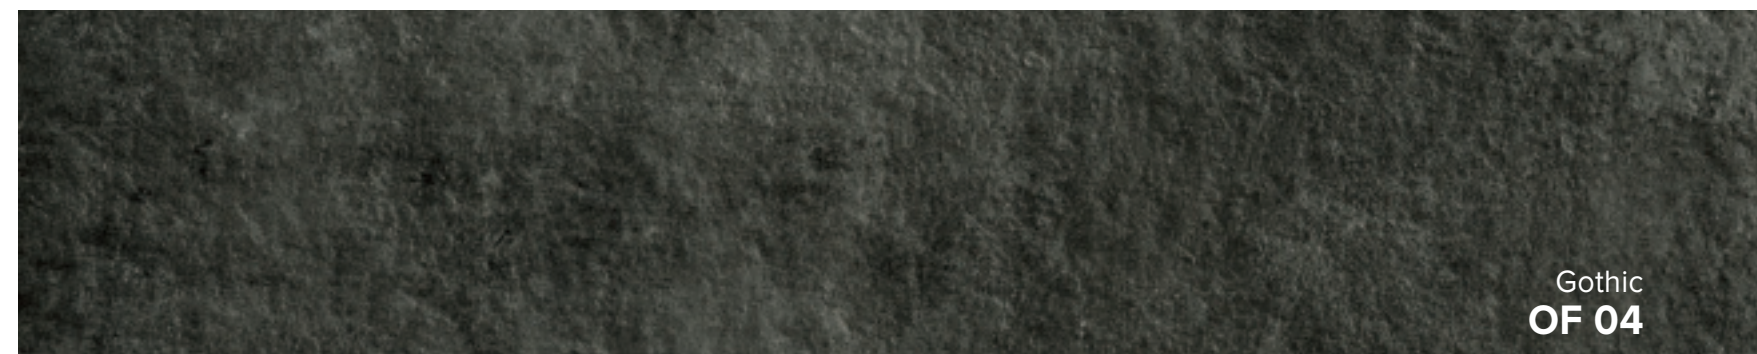

Gothic  
**OF 04**



Sunset  
**OF 05**











**COLORI**

Colours | Farben | Couleurs | Colores | Цветов | 种颜色









**ACID OF 01**



  		
 <b>Formati Nominali</b> Nominal Sizes	 <b>Superficie</b> Finish	 <b>Spessore mm</b> Thickness mm
 600x600 / 24"x24"  900x900 / 36"x36"	ST RECT	20
<b>Stucchi consigliati</b> Recommended grouts		
KERAKOLL	07	
MAPEI	111 Grigio Argento	
LATICRETE	88 Silver Shadow	









**GOTHIC OF 04**



  		
 <b>Formati Nominali</b> Nominal Sizes	 <b>Superficie</b> Finish	 <b>Spessore mm</b> Thickness mm
 600x600 / 24"x24"  900x900 / 36"x36"	ST RECT ST RECT	20 20
<b>Stucchi consigliati</b> Recommended grouts		
KERAKOLL	11	
MAPEI	114 Antracite	
LATICRETE	45 Raven	








**ROMANTIC OF 02**



  		
 <b>Formati Nominali</b> Nominal Sizes	 <b>Superficie</b> Finish	 <b>Spessore mm</b> Thickness mm
 600x600 / 24"x24"  900x900 / 36"x36"	ST RECT ST RECT	20 20
<b>Stucchi consigliati</b> Recommended grouts		
KERAKOLL	06	
MAPEI	110 Manhattan	
LATICRETE	89 Smoke Grey	









**SUNSET OF 05**



  		
 <b>Formati Nominali</b> Nominal Sizes	 <b>Superficie</b> Finish	 <b>Spessore mm</b> Thickness mm
 600x600 / 24"x24"	ST RECT	20
<b>Stucchi consigliati</b> Recommended grouts		
KERAKOLL	09	
MAPEI	113 Grigio Cemento	
LATICRETE	34 Sand Stone	

**DARK OF 03**



  		
 <b>Formati Nominali</b> Nominal Sizes	 <b>Superficie</b> Finish	 <b>Spessore mm</b> Thickness mm
 600x600 / 24"x24"  900x900 / 36"x36"	ST RECT ST RECT	20 20
<b>Stucchi consigliati</b> Recommended grouts		
KERAKOLL	11	
MAPEI	114 Antracite	
LATICRETE	45 Raven	

RIASSUNTIVO FORMATI ED IMBALLI

Summary of sizes and packaging | Übersicht über Formate und Verpackungen | Récapitulatif formats et emballages  
Sinóptico de formatos y embalajes | Краткая информация о форматах и упаковках | 规格和包装概述

		± 20 mm	
	<b>Formati Nominali</b> Nominal Sizes	600x600 24"x24"	900x900 36"x36"
<b>Tutti i formati sono rettificati.   All sizes are rectified.</b>			
	<b>Superficie</b> Finish	ST	ST
	<b>ACID OF 01</b>	V2	■
	<b>ROMANTIC OF 02</b>	V2	■
	<b>DARK OF 03</b>	V2	■
	<b>GOTHIC OF 04</b>	V2	■
	<b>SUNSET OF 05</b>	V2	■
	<b>Peso lordo per scatola</b> Gross weight per box	32,57	37,60
	<b>Pezzi per scatola</b> Pieces for box	2	1
	<b>mq. scatola</b> sqm. box	0,72	0,81
	<b>Scatole / Full pallet</b> boxes / Full pallet	30	18
	<b>mq. pallet</b> sqm. pallet	21,60	14,58

MY NOTES

.....

.....

.....

.....

.....

**Maggiori informazioni**  
More information



CARATTERISTICHE TECNICHE

Technical specifications | Technische Eigenschaften | Caractéristiques techniques | Características técnicas | Технические характеристики | 技术特征

STANDARD EN 14411 - G

	CARATTERISTICHE TECNICHE TECHNICAL DATA TECHNISCHE DATEN CARACTERISTIQUES TECHNIQUES CARACTERÍSTICAS TÉCNICAS ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ 技术特征	NORMA STANDARD NORM NORME NORMA ЗНАЧЕНИЯ 标准	VALORI PRESCRITTI DALLE NORME EN 14411 - G INTERNATIONAL STANDARDS EN 14411 - G INTERNATIONALE NORMWERTE EN 14411 - G VALEURS PREVUES PAR LES NORMES EN 14411 - G VALORES PREVISTOS POR LAS NORMAS EN 14411 - G ПРЕДУСМОТРЕННЫЕ СТАНДАРТОМ EN 14411-G EN 14411 - G标准规定值	*VALORE MEDIO MIRAGE MIRAGE AVERAGE VALUE MIRAGE MITTELWERT VALEURS MOYEN MIRAGE VALOR MEDIO MIRAGE СРЕДНЕЕ ЗНАЧЕНИЕ MIRAGE MIRAGE平均值
	<b>CARATTERISTICHE DIMENSIONALI</b> - SIZE CHARACTERISTICS - MASSEIGENSCHAFTEN DETERMINATION DES CARACTERISTIQUES DIMENSIONELLES - CARACTERÍSTICAS DIMENSIONALES - РАЗМЕРНЫЕ ХАРАКТЕРИСТИКИ - 尺寸特征			
	<b>LATI</b> SIDES - SEITEN COTES - CANTOS РАЗМЕРЫ СТОРОН - 側邊	EN ISO 10545-2	± 0,3% MAX (± 1,0 mm MAX)	CONFORME COMPLYING
	<b>SPESSORE</b> THICKNESS - DICKE ÉPAISSEUR - ESPESOR ТОЛЩИНА - 厚度	EN ISO 10545-2	± 5,0% MAX (± 0,5 mm MAX)	CONFORME COMPLYING
	<b>RETTILINEITÀ DEGLI SPIGOLI</b> STRAIGHTNESS OF SIDES - GERADLINIGKEIT DER KANTEN RECTITUDE DES ARETES - RECTITUD DE LOS CANTOS КОСОУГОЛЬНОСТЬ - 边角平直度	EN ISO 10545-2	± 0,3% MAX (± 0,8 mm MAX)	CONFORME COMPLYING
	<b>ORTOGONALITÀ</b> RECTANGULARITY - RECHTWINKLIGKEIT PERPENDICULARITÉ - ORTOGONALIDAD КРИВИЗНА СТОРОН - 直角度	EN ISO 10545-2	± 0,3% MAX (± 1,5 mm MAX)	CONFORME COMPLYING
	<b>PLANARITÀ</b> SURFACE FLATNESS - EBENFLÄCHIGKEIT PLANEITE DE SURFACE - PLANEIDAD КРИВИЗНА ЛИЦЕВОЙ ПОВЕРХНОСТИ - 平整度	EN ISO 10545-2	± 0,4% MAX (± 1,8 mm MAX)	CONFORME COMPLYING
	<b>ASSORBIMENTO D'ACQUA</b> WATER ABSORPTION - WASSERAUFNAHME ABSORPTION D'EAU - ABSORCIÓN DE AGUA ВОДОПОГЛОЩЕНИЕ - 吸水率	EN ISO 10545-3	≤ 0,5%	≤ 0,1%
	<b>RESISTENZA ALLA FLESSIONE</b> FLEXION RESISTANCE - BIEGEFESTIGKEIT RESISTANCE A LA FLEXION - RESISTENCIA A LA FLEXIÓN ПРЕДЕЛ ПРОЧНОСТИ ПРИ ИЗГИБЕ - 抗弯强度	EN ISO 10545-4	S ≥ 700 N (< 7,5 mm) S ≥ 1.300 N (> 7,5 mm) R ≥ 35 N/mm².	≥ 20 mm: S≥12.500N R≥48 N/mm²
	<b>RESISTENZA ALL'URTO</b> IMPACT RESISTANCE - STOSSFESTIGKEIT RESISTANCE AUX CHOCES - RESISTENCIA A LOS GOLPES УДАРСТОЙКОСТЬ - 抗冲击强度	EN ISO 10545-5	VALORE DICHIARATO DECLARED VALUE	> 0,80
	<b>RESISTENZA ALL'ABRASIONE</b> ABRASION RESISTANCE - ABRIEBFESTIGKEIT RESISTANCE A L'ABRASION - RESISTENCIA A LA ABRASIÓN СТОЙКОСТЬ К ИСТИРАНИЮ - 耐磨强度	EN ISO 10545-6	≤ 175 mm³	< 150 mm³
	<b>COEFFICIENTE DI DILATAZIONE TERMICA LINEARE</b> COEFFICIENT OF LINEAR THERMAL-EXPANSION - LINEARER WÄRMEAUDEHNUNGSKOEFFIZIENT COEFFICIENT DE DILATATION THERMIQUE LINEAIRE - COEFICIENTE DE DILATACIÓN TÉRMICA LINEAL КОЭФФИЦИЕНТ ЛИНЕЙНОГО ТЕРМИЧЕСКОГО РАСШИРЕНИЯ - 线性热膨胀系数	EN ISO 10545-8	—	α=6,2x10 <sup>-6</sup> °C <sup>-1</sup>
	<b>RESISTENZA AGLI SBALZI TERMICI</b> RESISTANCE TO THERMAL SHOCKS - BESTÄNDIGKEIT GEGEN TEMPERATURSCHWANKUNGEN RESISTANCE AUX CHOCES THERMIQUES - RESISTENCIA A LOS CHOQUES TÉRMICOS СТОЙКОСТЬ К ПЕРЕПАДАМ ТЕМПЕРАТУРЫ - 耐热突变性	EN ISO 10545-9	TEST SUPERATO SECONDO EN ISO 10545-1 PASS ACCORDING EN ISO 10545-1	NESSUN DANNO NO DAMAGE
	<b>RESISTENZA AL GELO</b> FROST RESISTANCE - FROSTBESTÄNDIGKEIT RESISTANCE AU GEL - RESISTENCIA AL HIELO МОРОЗОСТОЙКОСТЬ - 耐冻性	EN ISO 10545-12	TEST SUPERATO SECONDO EN ISO 10545-1 PASS ACCORDING EN ISO 10545-1	NESSUN DANNO NO DAMAGE
	<b>RESISTENZA ALL'ATTACCO CHIMICO</b> RESISTANCE TO CHEMICALS - CHEMIKALIENBESTÄNDIGKEIT RESISTANCE A L'ATTAQUE CHIMIQUE - RESISTENCIA QUÍMICA ХИМИЧЕСКАЯ СТОЙКОСТЬ - 耐化学品作用	EN ISO 10545-13	B MIN.	A LA HA
	<b>RESISTENZA ALLE MACCHIE</b> RESISTANCE TO STAINS - FLECKENBESTÄNDIGKEIT RESISTANCE AUX TACHES - RESISTENCIA A LAS MANCHAS УСТОЙЧИВОСТЬ К ПЯТНООБРАЗОВАНИЮ - 防污性	EN ISO 10545-14	VALORE DICHIARATO DECLARED VALUE	5
	<b>CESSIONE DI PIOMBO E CADMIO</b> LEAD AND CADMIUM DISCHARGE - ABGABE VON BLEI UND CADMIUM PERTE DE PLOMB ET CADMIUM - CESIÓN DE PLOMO Y CADMIO ВЫДЕЛЕНИЕ СВИНЦА И КАДМИЯ - 铅和镉的排放	EN ISO 10545-15	VALORE DICHIARATO DECLARED VALUE	< AL LIMITE DI RILEVAMENTO < THAN INSTRUMENT LIMIT
	<b>SCIVOLOSITÀ</b> SKID RESISTANCE - RUTSCHWERT GLISSANCE - ADHERENCIA СКОЛЬЗКОСТЬ - 防滑性			ST 20 mm
	<b>DM. 236/89 BCRA</b>		> 0,40	> 0,40
	<b>ANSI A1371</b>		Wet DCOF > 0,42	> 0,60
	<b>AS 4586:2013</b>		-	P4
	<b>DIN 51130</b>		-	R11
	<b>DIN 51097</b>		-	A+B
	<b>ENV 12633</b>		≥ CL1	CL3
	<b>UNI EN 13036 - 4:2011</b>		≥ 36	≥ 36

Per i certificati specifici, contattare Mirage SpA - For specific certificates, please contact Mirage SPA - Für die speziellen Zertifikate wenden Sie sich bitte an Mirage SpA - Pour les certificats spécifiques, veuillez contacter Mirage SPA  
Para los certificados específicos, contactar Mirage SPA - Для сертификатов обращайтесь в компанию Mirage SpA - 关于具体的证书, 请联系Mirage Spa公司