


BARI

Revestimiento Monoporosa Rectificado / Wall Tiles Rectified

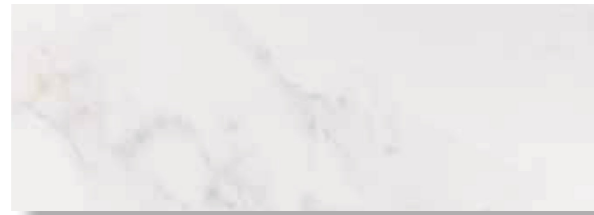


BARI BLANCO
31,6x90x0,9cm P3470763 / 100155617 G261
Butech recomienda junta / Butech recommends joint: Colorstuk Rapid n Blanco B22501001 / 100004294

PERFIL BARI BLANCO
1,5x31,6cm P6209112 / 100156686 G77
1,5x90cm P6560267 / 100156687 G97

CALACATA

Revestimiento Monoporosa Rectificado / Wall Tiles Rectified

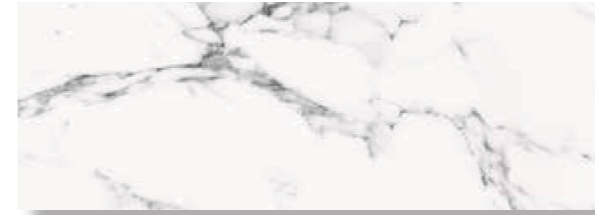

CALACATA SILVER PV
31,6x90x0,9cm P3470585 / 100104986 G261
Butech recomienda junta / Butech recommends joint: Colorstuk Rapid n Blanco B22501001 / 100004294

PERFIL CALACATA SILVER PV
1,5x31,6cm P6209060 / 100106086 G77
1,5x90cm P6560248 / 100106087 G97



CALACATA GOLD PV
31,6x90x0,9cm P3470587 / 100104984 G261
Butech recomienda junta / Butech recommends joint: Colorstuk Rapid n Blanco B22501001 / 100004294


PERFIL CALACATA GOLD PV
1,5x31,6cm P6209061 / 100106084 G77
1,5x90cm P6560247 / 100106085 G97

TECHNICAL SPECS · INFORMACIÓN TÉCNICA

EMBALAJE / PACKING							
FORMATO cm	PZ/CJ	M2/CJ	CJ/PAL	M2/PAL	*KG/CJ	*KG/PAL	Adhesivo
31,6x90cm	4	1,14	57	64,84	18,48	1053,36	Ff-one n
1,5x31,6cm	30	0,28	42	11,94	3,84	151	Ff-one n
1,5x90cm	15	0,41	28	11,34	5,56	155,74	Ff-one n

*valores aproximados. *approximated values.

PAVIMENTO COMBINABLE: SERIE BARI 59,6x59,6cm · PAG.199
FLOOR TILES COMBINATIONS: BARI SERIES 59,6x59,6cm · PAG.199



TECHNICAL SPECS · INFORMACIÓN TÉCNICA

EMBALAJE / PACKING							
FORMATO cm	PZ/CJ	M2/CJ	CJ/PAL	M2/PAL	*KG/CJ	*KG/PAL	Adhesivo
31,6x90cm	4	1,14	57	64,84	18,48	1053	Ff-one n
1,5x31,6cm	30	0,28	42	11,94	3,84	161,28	Ff-one n
1,5x90cm	15	0,41	28	11,34	5,6	156,66	Ff-one n

*valores aproximados. *approximated values.

PAVIMENTO COMBINABLE: SERIE CALACATA 43,5x43,5cm · PAG.200
FLOOR TILES COMBINATIONS: CALACATA SERIES 43,5x43,5cm · PAG.200



BARI BLANCO 31,6x90cm



CALACATA SILVER 31,6x90cm



BALI BLANCO 59,6x59,6cm

PERSIA


Gres Rectificado / Rectified Floor Tiles



PERSIA P-R
59,6x59,6x1,1cm P1856999 / 100179118 G347
Butech recomienda junta / Butech recommends joint:
Colorstuk Rapid n Blanco B22501001 / 100004294

BARI

Gres Rectificado / Rectified Floor Tiles

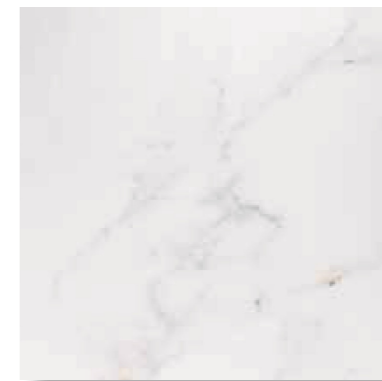

BARI BLANCO P-R
59,6x59,6x1,1cm P1856957 / 100155618 G347
Butech recomienda junta / Butech recommends joint:
Colorstuk Rapid n Blanco B22501001 / 100004294

TECHNICAL SPECS · INFORMACIÓN TÉCNICA

EMBALAJE / PACKING

FORMATO cm	PZ/CJ	M2/CJ	CJ/PAL	M2/PAL	*KG/CJ	*KG/PAL	Adhesivo
59,6x59,6cm	4	1,42	32	45,47	35,04	1121,3	one-flex n / maxifluid
10x44,6cm Zócalo	20	0,87	72	62,84	18,79	1352,68	one-flex n
31,6x59,6cm Huella Tec.	2	0,42	48	19,97	11,33	543,84	one-flex n / maxifluid
31,6x59,6cm Huella Tec. Esq.	1	0,21	48	9,98	5,67	271,92	one-flex n / maxifluid

*valores aproximados. *approximated values.

1
INTENSIDAD DE TRÁNSITO PEATONAL: TRÁNSITO MODERADO
INTENSITY OF PEDESTRIAN TRANSIT: MODERATE TRANSIT

ZÓCALO	10x44,6cm	
PERSIA	P4328113 / 100180414	G7
BARI BLANCO	P8323609 / 100183950	G7



- HUELLA TÉCNICA 31,6x59,6cm

			ESQUINA DERECHA		ESQUINA IZQUIERDA	
PERSIA	P9210434 / 100193853	G130	P9210440 / 100193949	G150	P9210437 / 100193849	G150
BARI BLANCO	P9210302 / 100169575	G130	P9210412 / 100193835	G150	P9210406 / 100193845	G150