

# calacatta

porcelux

# calacatta

porcelux



blanco



prismacer

**AZULEJOS FOSET, S.L.U**  
 CAMINO DEL PALMERAL, 10  
 APARTADO DE CORREOS 263  
 POL. IND. EL COLOMER  
 12200 ONDA (CASTELLÓN) ESPAÑA  
 TEL.: +34 964 500 226  
 FAX: +34 964 500 039

info@prismacer.es  
[www.prismacer.es](http://www.prismacer.es)



formato	price	pz/cj	kg/cj	m <sup>2</sup> /cj	cj/pl	kg/pl	m <sup>2</sup> /pl
90x180	PS-105	1	45	1,62	26	1,170	42,12
120x120	PS-102	1	39	1,44	36	1,444	51,84
60x120	PS-97	2	38,9	1,44	27	1,070,3	38,88
45x90	PS-94	3	30,8	1,21	44	1,375,2	53,24
75x75	PS-90	3	42,8	1,69	30	1,304	50,07
59,8x59,8	PS-88	4	30	1,44	30	920	43,2
29,7x59,8	PS-86	6	24	1,08	48	1,172	51,84



prismacer

PVTO.: CALACATTA BLANCO 60x120


# calacatta

porcelux



PVTO.: CALACATTA BLANCO 75x75

## formatos / formats

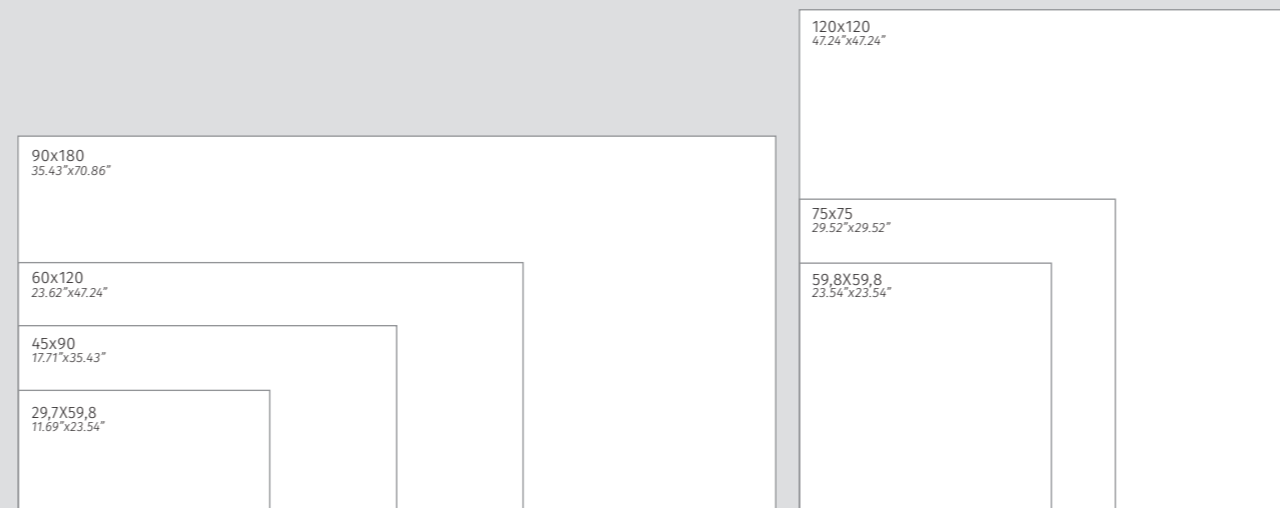

# calacatta

porcelux

## características técnicas porcelux

GRUPO Bia (GL) Absorción de agua < 0,5%  
GROUP Bia (GL) Water absorption < 0,5%  
GROUPE Bia (GL) Absorption d'eau < 0,5%

NORMAS DE ENSAYO  
STANDARD  
NORMES D'ESSAI

VALORES PRESCRITOS NORMA EN 14411  
VALUE REQUIRED BY EN 14411 STANDARD  
VALEURS PRESCRITES NORME EN 14411

VALOR MEDIO  
AVERAGE VALUE  
VALEUR MOYENNE

